

GPX Series


Full Service - Electric Fire Pump Controllers

Standard Features

- ViZiTouch V2 operator interface
- NEMA 2 assembly
- Pressure and event recorder
- Voltage and amperage display
- Single operator for both isolating switch and circuit breaker
- Surge arrestor
- Lifting lugs
- Run test push button
- Available with automatic power transfer switch
- Emergency start handle
- Start and stop pushbuttons
- Locked rotor protector
- Phase reversal indication
- Remote start / deluge valve start provision
- Pressure transducer and run test solenoid valve externally mounted
- Gland plate
- Audible alarm
- Alarm contacts for remote indication
- Available with full voltage and reduced voltage starting



1. Alarm bell
2. Externally mounted pressure transducer and run test solenoid valve with protective cover
3. Lifting Lugs
4. ViZiTouch V2 operator interface
5. Exterior USB Port
6. Custom designed Isolation switch / Circuit breaker operator handle
7. Key lock
8. Remote alarm contacts with removable terminals
9. Surge arrestor
10. Custom designed emergency start mechanism with integrated limit switch
11. Gland plate
12. Automatic power transfer switch

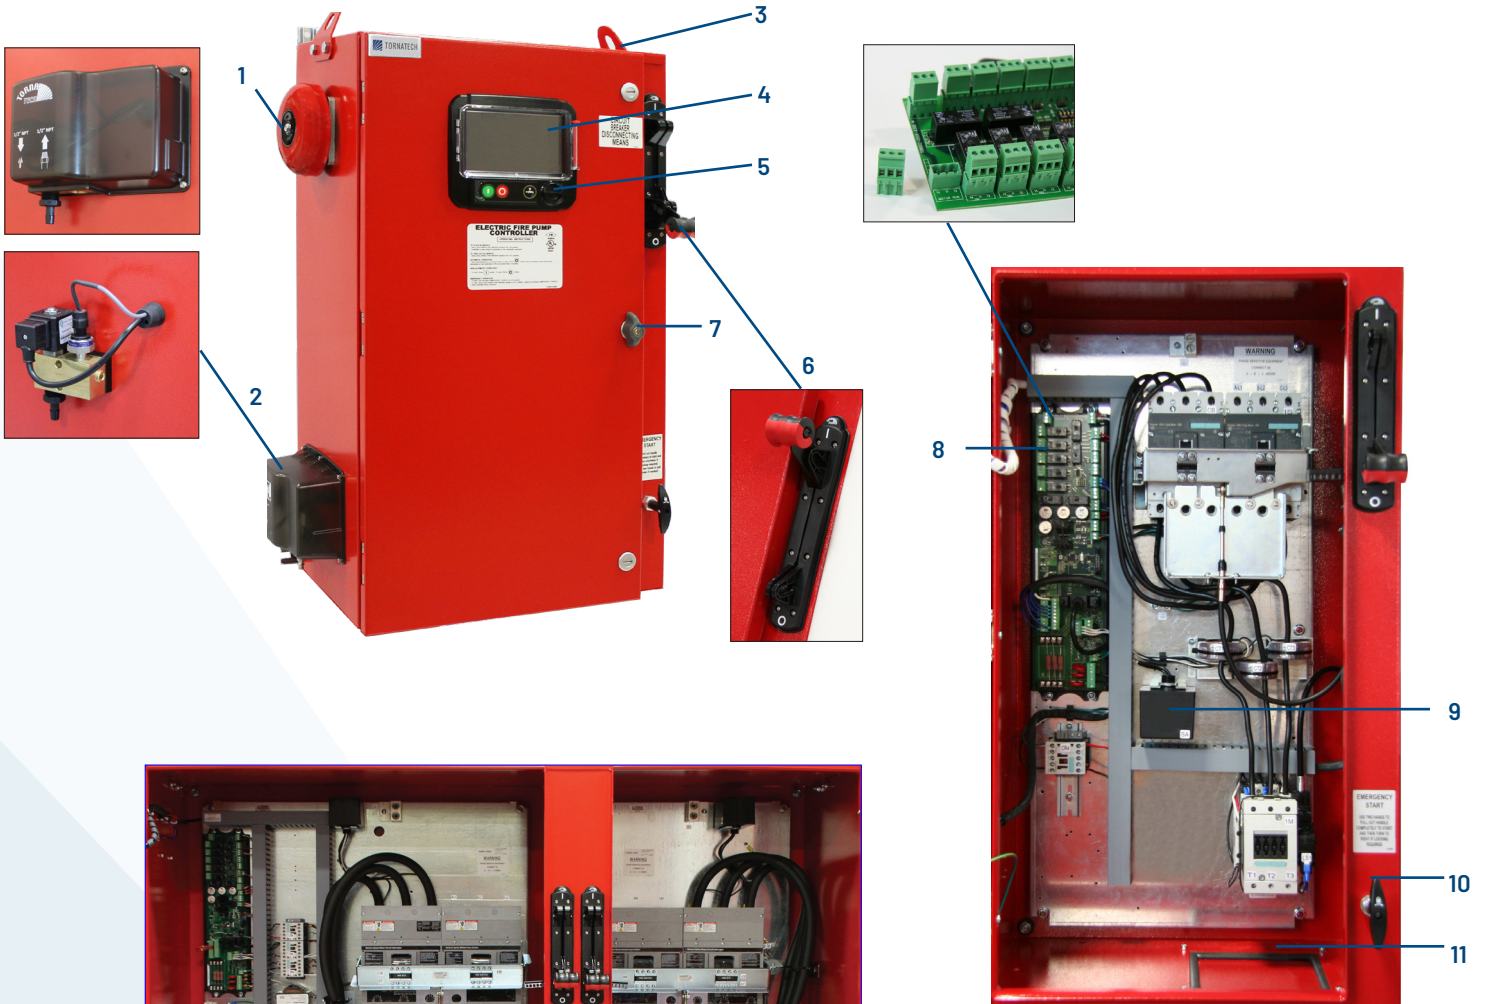

GPA MODEL SHOWN

GPW + GPU MODEL SHOWN




ViZiTouch V2 Operator Interface




HOME SCREEN


Electric Fire Pump Controller

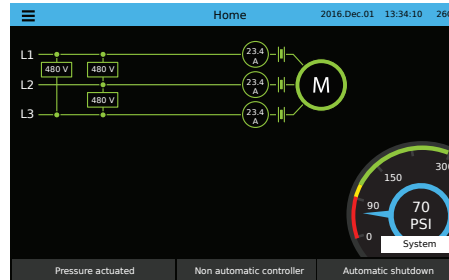


Electric Fire Pump Controller with Automatic Transfer Switch

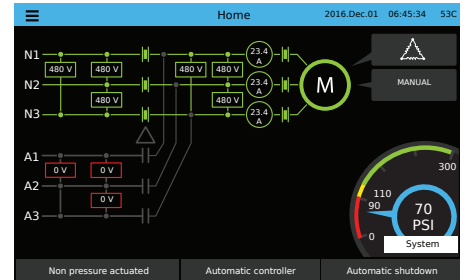


ON-SCREEN MENU

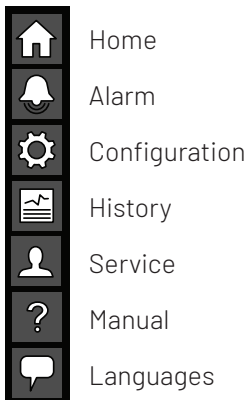

SETTINGS

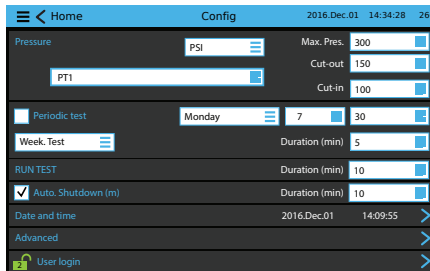


EVENTS

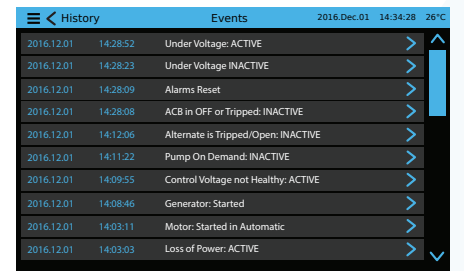


VIZITOUCH V2 MAJOR FEATURES INCLUDE:

- Touch screen operation with 7" color display and intuitive graphics
- Multi-language
- Upgradable software
- Password protected


HISTORY/STATISTICS

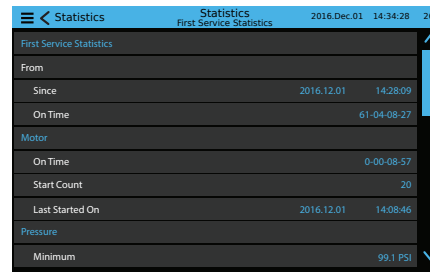


SERVICE

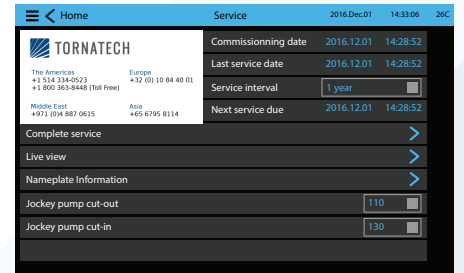

PUMP CURVES

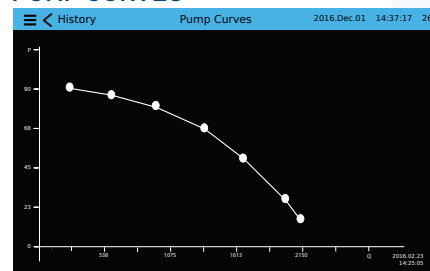

PRESSURE CURVES

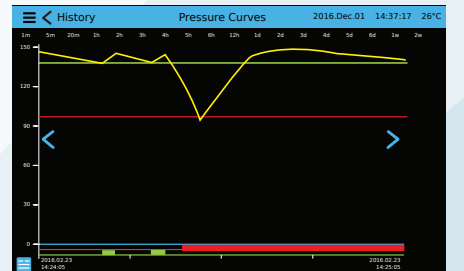

GPX SERIES / VOLTAGE / HP / SHORT CIRCUIT WITHSTAND RATING / SEISMIC CERTIFICATION

Model	Voltage	HP	Short Circuit Withstand Rating	Seismic Certified
GPA GPA+GPU GPP GPP+GPU GPY GPY+GPU	200V - 208V	5-150	100kA	Yes
		200	50kA	No
	220V - 240V	5-200	100kA	Yes
		250	50kA	No
	380V - 416V	5-300	100kA	Yes
		350-450	50kA	No
	440V - 480V	5-400	100kA	Yes
		450		No
		500	50kA	Yes
	575V - 600V	5-500		Yes
GPR GPR+GPU GPW GPW+GPU	200V - 208V	5-150	100kA	Yes
		200	50kA	No
	220V - 240V	5-200	100kA	Yes
		250	50kA	No
	380V - 416V	5-300	100kA	Yes
		350-450	50kA	No
	440V - 480V	5-400	100kA	Yes
		450		No
		500	50kA	No
	575V - 600V	5-500		Yes

Model	Voltage	HP	Short Circuit Withstand Rating	Seismic Certified
GPS GPS+GPU	200V - 208V	5-100	100kA	Yes
		150		No
		200	50kA	
	220V - 240V	5-150	100kA	Yes
		200		No
		250	50kA	
	380V - 416V	5-250	100kA	Yes
		300		No
		350-450	50kA	
	440V - 480V	5-300	100kA	Yes
		350		No
		400		
		450		
	575V - 600V	500	50kA	Yes
		5-400		No
		450		
		500		No

HOW TO ORDER: GPx - V / HP / Ph / Hz / Options
 Ex.: GPA - 208 / 30 / 3 / 60 / Options

AMERICAS
 Tornatech Inc.
 Head Office
 Laval, Quebec, Canada
 Tel: + 1 514 334 0523
 Toll free: + 1 800 363 8448

EUROPE
 Tornatech Europe SPRL
 Wavre, Belgium
 Tel: + 32 (0) 10 84 40 01

MIDDLE EAST
 Tornatech FZE
 Dubai, United Arab Emirates
 Tel: + 971 (0) 4 887 0615

ASIA
 Tornatech Pte Ltd.
 Singapore
 Tel: + 65 6795 8114
 Tel: + 65 6795 7823